

# Beam Clamp®

A KEE SAFETY PRODUCT

SAFE STEELWORK CONNECTIONS

## FloorFix



- INSTALLATION FROM ONE SIDE ONLY
- MANUFACTURED FROM DUCTILE IRON
- HOT DIP GALVANISED
- ALLOWS FOR EASY MAINTENANCE



# FloorFix

**FLOORFIX** by **BEAMCLAMP** is designed for positioning chequer/durbar plate to steelwork without the need for time consuming welding or drilling of the supporting steelwork.


**FLOORFIX** allows the connection to be made without the need for access to the underside of the floor plate enabling installation by one person only.

Using only simple hand tools, the floor plate can be secured quickly and easily and likewise removed or repositioned with equal ease.

The standard **FLOORFIX** is designed to suit floor plate ranging from 3mm to 12mm thick and steelwork flanges up to 15mm thick. Should your steelwork be thicker than this we can provide a spacer to increase the fixing range, please contact us should this be required.

| Product Code | Screw Diameter | Floor Plate Thickness |      | Steelwork Flange Thickness |      | Tightening Torque (Nm) |
|--------------|----------------|-----------------------|------|----------------------------|------|------------------------|
|              |                | Min.                  | Max. | Min.                       | Max. |                        |
| FLOORFIXM08  | M08            | 3                     | 12   | 3                          | 15   | 20                     |
| FLOORFIXM10  | M10            | 5                     | 12   | 3                          | 15   | 20                     |
| FLOORFIXM12  | M12            | 6                     | 12   | 3                          | 15   | 30                     |

## Features of FLOORFIX

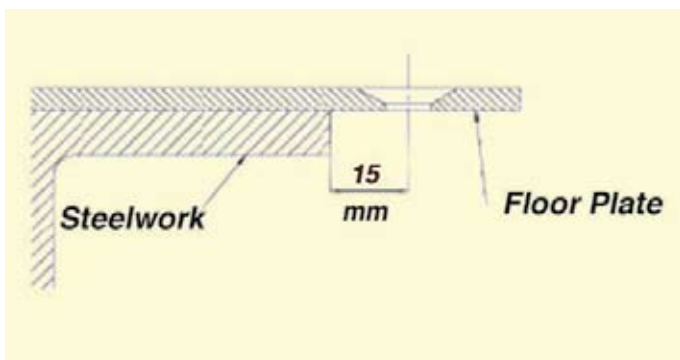

## Benefits of FLOORFIX



- Designed for easy assembly on site
- Available in M08, M10 or M12 CSK screw
- Can fix up to 15mm thick steel as standard
- Hot Dip Galvanised finish as standard
- Tested for vibration conditions at TÜV
- Savings in installation time and cost
- Easily installed from one side only
- No special tools or skilled labour required
- No drilling or welding required
- Excellent corrosion resistance



Kee Safety Ltd.  
Cradley Business Park  
Overend Road  
Cradley Heath  
B64 7DW

Tel: +44 (0) 1384 632 188

Fax: +44 (0) 1384 632 192

Email: [sales@keesafety.com](mailto:sales@keesafety.com)

[www.keesafety.co.uk](http://www.keesafety.co.uk)